

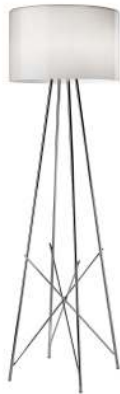







Ray Floor 1

by Rodolfo Dordoni , 2006



Floor lamp providing diffused lighting. Steel tube (10 mm diam.) structure, welded, brushed and chrome-plated. Diffuser support disk in die-cast, polished and chrome-plated Zamak alloy. Injection-molded PA6 (nylon) lamp-cover. Color: white. Injection-molded PC (polycarbonate) inner diffuser. Color: 3% opal. Injection-molded elastic PVC (polyvinylchloride) feet. Lathe-shaped aluminum diffusers, painted white on the inside, and shiny white or black on the outside or gray-colored, blown and overlaid glass with glossy external finish. On the cable there is the electronic dimmer which allows the regulation of light brightness.



| | |
|--------------------------------|--|
| Mounting | Floor |
| Environment | Indoor |
| Finish | White, Glass, Black |
| Weight | 5.0 (met) - 8.0 (glass) Kg |
| Light sources available | 1 x LED 8W E27 740lm 2700K [e] cod. RF25323 DIMMER 1 x LED 8W E27 740lm 3000K [e] cod. RF25317 DIMMER |
| Emergency | Without |
| Switching | On the cable there is the electronic dimmer which allows the regulation of light brightness with a dial. |
| Voltage | 220-240V |
| Power | MAX 150W |
| Battery | No |
| Supply included | Yes |
| Cord Length | 2300 mm |
| Materials | Aluminum, Glass, Steel |
| Colors | ● F5916030 - Black ● F5916009 - White ● F5915020 - Glass |
| Certificate |      |